

BlueWave[®] MX-250 Glass Window Replacement Instructions

1. Before starting, disconnect power to the unit.
2. Lay the emitter on its side with the cover facing upwards. Using a 5/64" hex key, loosen and fully remove the two screws (Figure 1).
3. Remove the side cover by lifting from the bottom as shown in Figure 2.

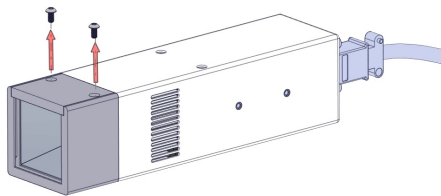


Figure 1

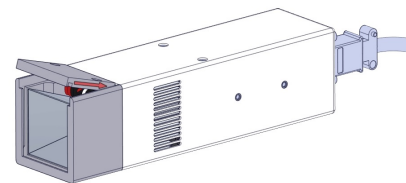


Figure 2

4. Slide the damaged glass cover out (Figure 3), taking care not to touch the metallic reflector surfaces.

NOTE: If the old window has shattered, be sure to remove all debris before attempting to install the new glass window.

5. Unwrap the new window and carefully clean it with the enclosed alcohol swab. Holding the window by its sides, slide it into the groove on the emitter (Figure 4). Take care not to touch the glass with bare hands, as any residue left on the window can adversely affect the performance of the unit.

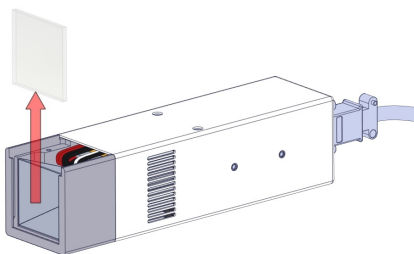


Figure 3

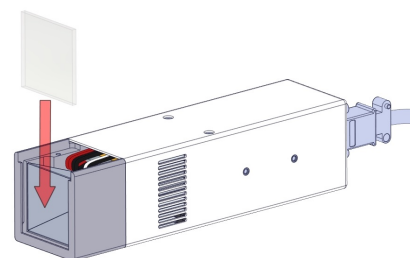


Figure 4

6. Reversing steps 2 & 3, reinstall the side cover, insert the two screws and tighten.

© 2017 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to ensure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request. QS083 9/7/2017

Dymax Corporation
+1.860.482.1010 | info@dymax.com | www.dymax.com

Dymax Europe GmbH
+49 611.962.7900 | info_de@dymax.com | www.dymax.de

Dymax Engineering Adhesives Ireland Ltd.
+353 21.237.3016 | info_ie@dymax.com | www.dymax.ie

Dymax Oligomers & Coatings
+1.860.626.7006 | info_oc@dymax.com | www.dymax-oc.com

Dymax UV Adhesives & Equipment (Shanghai) Co. Ltd.
+86.21.37285759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax UV Adhesives & Equipment (Shenzhen) Co. Ltd.
+86.755.83485759 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia (H.K.) Limited
+852.2460.7038 | dymaxasia@dymax.com | www.dymax.com.cn

Dymax Asia Pacific Pte. Ltd.
+65.6752.2887 | info_ap@dymax.com | www.dymax-ap.com

Dymax Korea LLC
+82.2.784.3434 | info_kr@dymax.com | www.dymax.com/kr